



'Fluid control' the Complete solution from one source !

Universal Engineering

32, Gajanan Industrial Estate, Old Manekchowk Mill Compound,
Nr. Idgah Police Chowky, O/s. Dariapur Gate, Ahmedabad - 380 016, Gujarat, INDIA.


Phone : +91-79-2212 5274

E-mail : universalvalves09@gmail.com

FABRICATED STRAINER BASKET TYPE

Technical Specification

Manufacturing Std : Universal/014
End Connection : Flanged Ends to
ANSI B16.5 RF 150#
Inspection and
Testing Std. : BS 6755 (Part-1)

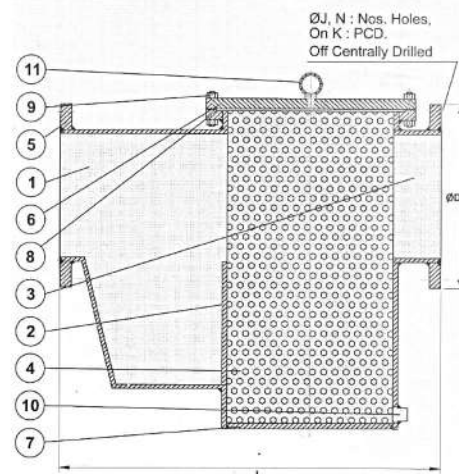

Test Pressure	
TESTING	BODY
HYDRAULIC	32 Kg/Cm ²

P.No.	Qty.	Parts List	Material
1	1	Inlet	Carbon Steel IS 2062
2	1	Body	Carbon Steel IS 2062
3	1	Outlet	Carbon Steel IS 2062
4	1	Screen	SS 304
5	2	Side Flanges	Carbon Steel IS 2062
6	2	Cover	Carbon Steel IS 2062
7	1	End Plate	Carbon Steel IS 2062
8	1	Gasket	Fibre
9	Req.	Cover Studs & Nuts	Carbon Steel to IS 1363
10	1	Drain Plug	Carbon Steel
11	1	Eye Hook	ASTM A 307 Gr. B

Available Options		
STRUCTURE	End Connection	Flange End as per ASA 150# / 300# / 600#
MATERIAL	Body	IS 2062/BS 2762/BS 4360 / ASTM A53
	Trims	SS 304, SS 316, ETC

Features

Design Standards:

- Universal 014

Design Configurations:

- Bolted Cover
- Available Mesh From 2 to 500
- Finer on Demand
- POT Type Construction
- Drain Plug on Demand

Size Range:

- 1"-48"
- DN 25-DN 1200

Pressure Rating:

- ANSI 150

All dimensions are in M.M.

Size	25	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L Face to Face - RF	250	310	310	310	350	380	450	450	550	630	700	800	900	1000	1100	1300
ØD	110	125	150	180	190	230	255	280	345	405	485	535	595	635	700	815
ØJ	15.9	15.9	19.05	19.05	19.05	19.05	22.2	22.2	22.2	25.4	25.4	28.6	28.6	31.8	31.8	34.9
N	4	4	4	4	4	8	8	8	8	12	12	12	16	16	20	20
K: PCD	79.4	98.4	120.7	139.7	152.4	190.5	215.9	241.3	298.5	362	431.8	476.3	539.8	577.9	635	749.3

The Desor And Emical Data Furnished Here Are Subject To Continuous Product Development

