



'Fluid control' the Complete solution from one source !

Universal Engineering


32, Gajanan Industrial Estate, Old Manekchowk Mill Compound,
Nr. Idgah Police Chowky, O/s. Dariapur Gate, Ahmedabad - 380 016, Gujarat, INDIA.

Phone : +91-79-2212 5274

E-mail : universalvalves09@gmail.com

DUAL PLATE CHECK VALVE

P.No.	Nomenclature
1	BODY
2	BONNET.
3	WEDGE
4	STEM
5	STEM RETAINER
6	GLAND
7	GLAND NUT
8	STEM PACKING
9	HAND WHEEL
10	HAND WHEEL NUT & WASHER

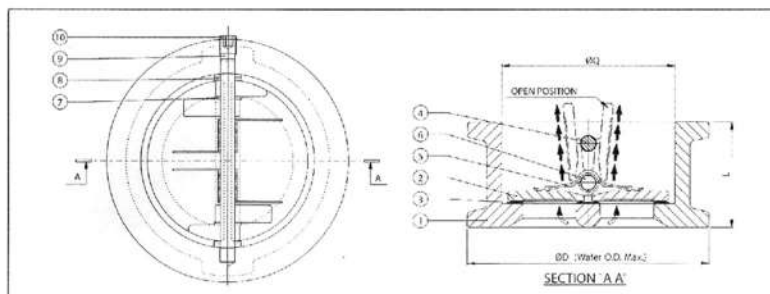

THE DESIGN AND TECHNICAL DATA FURNISHED HERE ARE SUBJECT TO CHANGE DUE TO CONTINUOUS PRODUCT DEVELOPMENT

Size N. B.	ANSI RATING	FACE	DIMENSIONS (mm)		
			D	L	Q
50 mm (2")	125	FF	105	54	60
	150	RF/RJ-22	105	60	60
	300	RF/RJ-23	111	60	60
	600	RE/RJ-23	111	60	60
65 mm (2½")	125	FF	124	54	73
	150	RF/RJ-25	124	67	73
	300	RF/RJ-26	130	67	73
	600	RE/RJ-26	130	67	73
80 mm (3")	125	FF	137	57	89
	150	RF/RJ-29	137	73	89
	300	RF/RJ-31	149	73	89
	600	RE/RJ-31	149	73	89
100 mm (4")	125	FF	175	64	114
	150	RF/RJ-36	175	73	114
	300	RF/RJ-37	181	73	114
	600	RE/RJ-37	194	79	114
125 mm (5")	125	FF	197	70	141
	150	RF/RJ-40	197	86	141
	300	RF/RJ-41	216	86	141
	600	RE/RJ-41	241	105	141
150 mm (6")	125	FF	222	76	168
	150	RF/RJ-43	222	98	168
	300	RF/RJ-45	251	98	168
	600	RE/RJ-45	267	137	168
200 mm (8")	125	FF	279	95	219
	150	RF/RJ-48	279	127	219
	300	RF/RJ-49	308	127	219
	600	RE/RJ-49	321	165	219
250 mm (10")	125	FF	340	108	273
	150	RF/RJ-52	340	146	273
	300	RF/RJ-53	362	146	273
	600	RE/RJ-53	400	213	273

Size N. B.	ANSI RATING	FACE	DIMENSIONS (mm)		
			D	L	Q
300 mm (12")	125	FF	410	143	324
	150	RF/RJ-56	410	181	324
	300	RF/RJ-57	422	181	324
	600	RE/RJ-57	457	229	324
350 mm (14")	125	FF	451	184	356
	150	RF/RJ-59	451	184	356
	300	RF/RJ-61	486	222	356
	600	RE/RJ-61	514	232	356
400 mm (16")	125	FF	514	191	406
	150	RF/RJ-64	514	191	406
	300	RF/RJ-65	540	232	406
	600	RE/RJ-65	549	203	457
450 mm (18")	125	FF	549	203	457
	150	RF/RJ-68	549	203	457
	300	RF/RJ-69	597	264	457
	600	RE/RJ-69	606	213	508
500 mm (20")	125	FF	606	213	508
	150	RF/RJ-72	606	219	508
	300	RF/RJ-73	645	292	508
	600	RE/RJ-73	659	222	559
550 mm (22")	125	FF	659	222	559
	150	RF/RJ-80	659	222	559
	300	RF/RJ-81	703	318	559
	600	RE/RJ-81	716	222	610
600 mm (24")	125	FF	716	222	610
	150	RF/RJ-76	716	222	610
	300	RF/RJ-77	775	318	610
	600	RE/RJ-77	773	248	660
650 mm (26")	125	FF	773	248	660
	150	RF	773	248	660
	300	RF	830	305	711
	600	RE	830	305	711
700 mm (28")	125	FF	830	305	711
	150	RF	830	305	711
	300	RF	881	305	762
	600	RE	881	305	762
750 mm (30")	125	FF	881	305	762
	150	RF	881	305	762
	300	RF	939	356	813
	600	RE	939	356	813
800 mm (32")	125	FF	939	356	813
	150	RF	939	356	813
	300	RF	990	356	864
	600	RE	990	356	864
850 mm (34")	125	FF	990	356	864
	150	RF	990	356	864
	300	RF	1047	368	914
	600	RE	1047	368	914
900 mm (36")	125	FF	1047	368	914
	150	RF	1047	368	914
	300	RF	1047	368	914
	600	RE	1047	368	914

