



'Fluid control' the Complete solution from one source !

Universal Engineering

32, Gajanan Industrial Estate, Old Manekchowk Mill Compound,
Nr. Idgah Police Chowky, O/s. Dariapur Gate, Ahmedabad - 380 016, Gujarat, INDIA.

Phone : +91-79-2212 5274

E-mail : universalvalves09@gmail.com


I.C CF8 / CF8M 3 WAY BALL VALVE F/E 150# "L" PORT

Standard

DESIGN & MANUFACTURING STD : ASME B 16.34 / API 6D
VALVE FACE TO FACE DIMENSION : As Per Manufacturing
FLANGE STANDARD CONFORMITY : ASME B 16.5 Class 150. 300
INSPECTION & TESTING : API 598 / FCI - 702/BS EN 12266-2

TECHNICAL SPECIFICATIONS :

Body	ASTM A216 Gr. WCB/ASTM/A 351 Gr. CF8/CF8M/CF3M
Ball	ASTMA 351 Gr. CF8/CF8M/CF3M
Seat & Seal	PTFE
End Connection	Flanged to-ASME B16.5 Class 150/300
Type of valve body & Ball	Full Port, On/Off type
Working Fluid	Water, Air, Oil
Working Temperature	180 °C
Working Pressure	10 Bar
Pressure Rating	150#
End Connection	Flange End 150#
Leakage Class	Class VI
Port	Only "L" Port Available

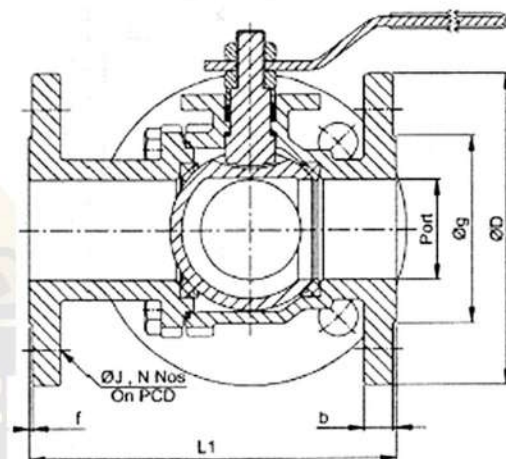

Valve Model	Valve Size		PORT	L1	ØD	b	Øg	f	ØJ	N	PCD
	MM	INCH									
CWP-25	25	1"	25	160	110	9.6	50.8	2	15.9	4	79.4
CWP-40	40	1.1/2"	38	200	125	12.7	73	2	15.9	4	98.4
CWP-50	50	2"	49	178	150	14.3	92.1	2	19.05	4	120.7
CWP-65	65	2.1/2"	64	190	180	15.9	104.8	2	19.05	4	139.7
CWP-80	80	3"	75	203	190	17.5	127	2	19.05	4	152.4
CWP-100	100	4"	98	305	230	22.3	157.2	2	19.05	8	190.5
CWP-125	125	5"	127	356	255	22.3	157.2	2	22.2	8	215.9
CWP-150	150	6"	148	394	280	23.9	215.9	2	22.2	8	241.3
CWP-200	200	8"	201	600	345	27	269.9	2	22.2	8	298.0

SIZE RANGE: 1" TO 8"

All dimensions are in M.M.

