



'Fluid control' the Complete solution from one source !

Universal Engineering

32, Gajanan Industrial Estate, Old Manekchowk Mill Compound,
Nr. Idgah Police Chowky, O/s. Dariapur Gate, Ahmedabad - 380 016, Gujarat, INDIA.

Phone : +91-79-2212 5274




E-mail : universalvalves09@gmail.com

INVESTMENT CASTING CF8 / CF8M 3 WAY BALL VALVE SCREWED ENDS "T" PORT OR "L" PORT

Technical Data

Manufacturing Std : As Per Manufacture
End Connection : Screwed End to BSP (F)
INSPECTION AND TESTING STD : Generally Conforming to BS EN 12266-1

P. No.	QTY.	NOMENCLATURE	MATERIAL
1	1	BODY	ASTM A351 Gr. CF8/CF8M
2	3	CONNECTORS	ASTM A351 Gr. CF8/CF8M
3	1	BALL	ASTM A351 Gr. CF8/CF8M
4	1	STEM	SS
5	1	GLAND	SS
6	4	BALL SEALS	PTFE
7	3	BODY SEALS	PTFE
8	1	STEM PACKING	PTFE
9	Req.	GLAND PACKINGS	PTFE
10	1	WASHER	SS
11	1	STEM NUT	SS
12	1	HANDLE	SS
13	1	SLEEVE	PVC

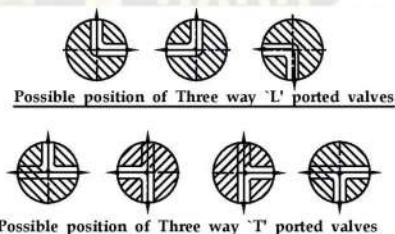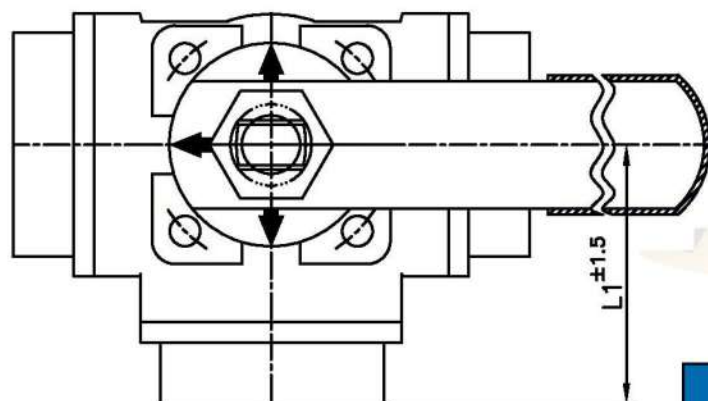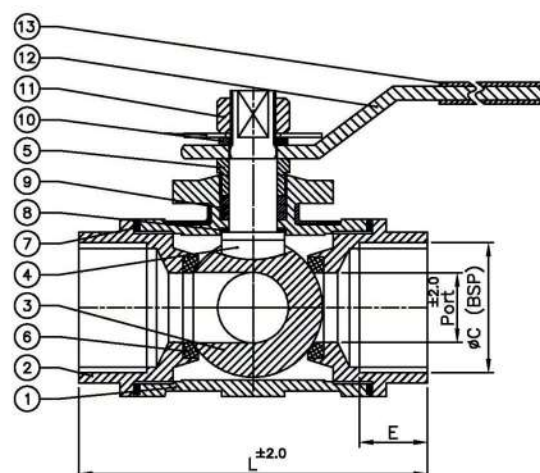

(WE RESERVE THE RIGHT TO CHANGE DESIGN AND TECHNICAL DATA FURNISHED HERE DUE TO CONTINUOUS PRODUCT DEVELOPMENT)



TEST PRESSURE		
TESTING	BODY	SEAT
HYDRAULIC	32 Kg/Cm ²	22 Kg/Cm ²
PNEUMATIC	-----	7 Kg/cm ²

All dimensions are in M.M.

Size	Port	L	L1	φC(BSP)	E	QTY.
15	12.5	72	36	1/2"	13.56	01
20	14	81	42	3/4"	13.87	01
25	18	89	44.5	1"	17.35	01
32	24.8	116	58	1.1/4"	17.95	01
40	32	121	60.5	1.1/2"	18.38	01
50	37	157	78.5	2"	19.23	01

