



'Fluid control' the Complete solution from one source !

Universal Engineering

32, Gajanan Industrial Estate, Old Manekchowk Mill Compound,
Nr. Idgah Police Chowky, O/s. Dariapur Gate, Ahmedabad - 380 016, Gujarat, INDIA.

Phone : +91-79-2212 5274


E-mail : universalvalves09@gmail.com

DOUBLE WINDOW SIGHT GLASS:

Technical Specification

Face to Face : As per Standard Length
End Connections : Flange Ends

Sr. No.	Parts Name	Material	Qty.
1	Body	CF8 (S.S. 304)/CF8M (S.S. 316)	1
2	Top & Bottom Flange	CF8 (S.S. 304)/CF8M (S.S. 316)	2
3	Seat Ring	PTFE	2+2
4	Glass	Toughened Borosilicate	2
5	Studs & Nut	M.S./S.S/202/304/316	4+4

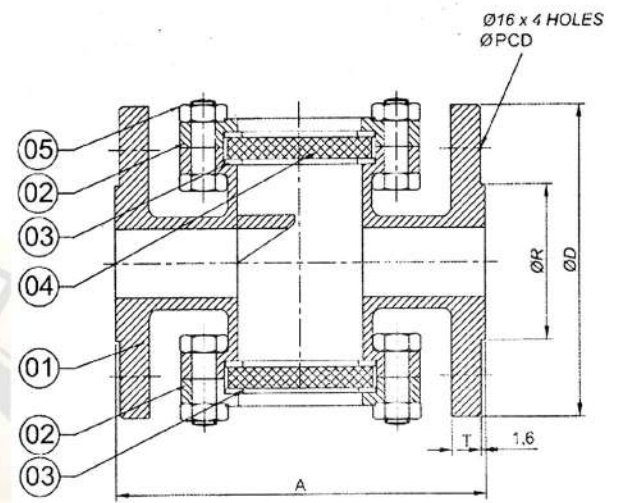

CLASS 150#							
Size	A	ØD	PCD	ØR	ØN	N	T
15	108	89	60.5	35	16	4	11.5
20	117	98.5	70	43	16	4	13.0
25	127	108	79.5	51	16	4	14.5
40	165	127	98.5	73	16	4	14.5
50	178	152.5	120.5	92	19	4	16.0
65	190	178	140	105	19	4	17.5
80	203	191	152.5	127	19	4	19.5
100	229	229	190.5	157	19	8	24.0



(All dimensions are in mm. Flange thickness including RF of 1.5mm thicknessA)

